
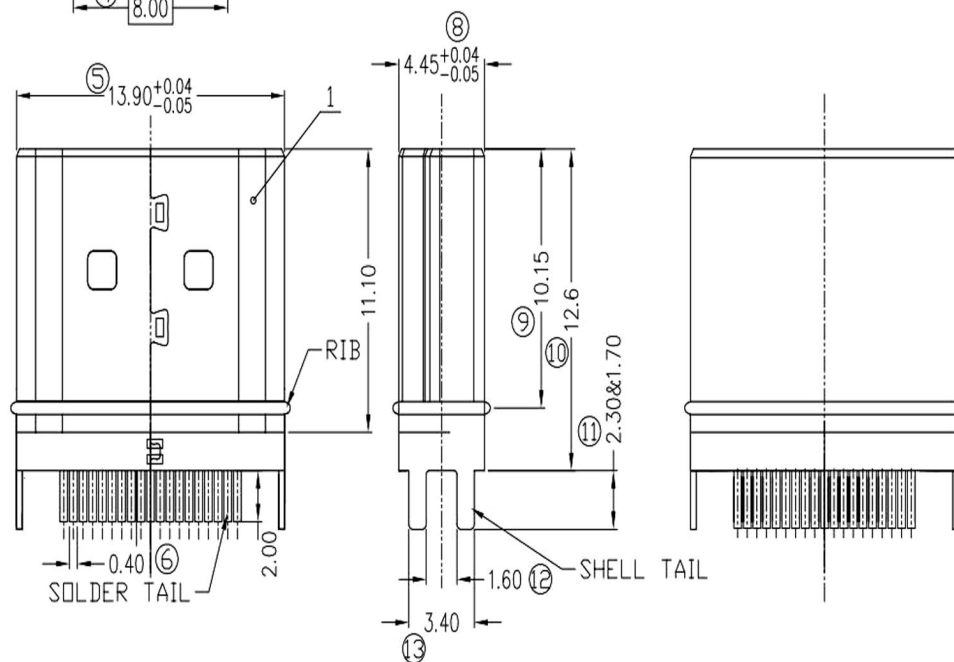
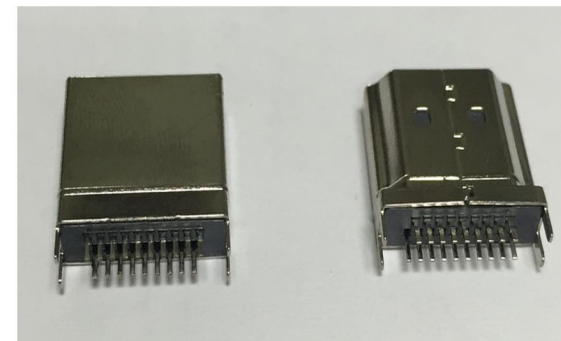


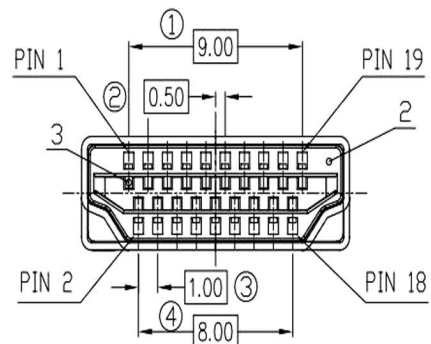

NOTE:

1. MECHANICAL :

1.1 INSERTION FORCE :44.1 N MAX

1.2 WITHDRAWAL FORCE :9.8 N MIN,39.2N MAX..

2. ELECTRICAL :

2.1 CONTACT CURRENT RATING: 0.5A MIN.

2.2 VOLTAGE RATING :40V AC (rms)

2.3 WITHSTANDING VOLTAGE: 500 VAC FOR 1 MINUTE.

2.4 INSULATION RESISTANCE: 100 MEGAOHMS MIN.

2.5 CONTACT RESISTANCE: 30 MILLIOHMS MAX.

3. ENVIRONMENTAL :

3.1 OPERATING TEMPERATURE:-25°C TO +85°C

3	CONTACT	19	C5191	SELECTED GOLD PLATED OVER NICKEL-TIN PLATED IN THE SOLDER AREA
2	HOUSING	1	LCP, BLACK	
1	SHELL	1	C2680 & SPCC	NICKEL PLATED
ITEM	PART NAME	QTY.	MATERIAL	REMARK

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例	TOLERANCE 容許公差	PART NAME 品名
DWG. 製圖	參考	.0 ± 0.30 .00 ± 0.25 ANG. ± 1°	HDMI CONNECTOR 19PIN MALE WITHOUT PCB BOARD
DATE 制表日	UNIT 單位	SIZE. 紙張尺寸	SELECTIVE GOLD PLATING NICKEL PLATING
2015/09/21	M M	A 4	BLACK COLOR MATERIAL:LCP PIN LENGTH:2.0mm
PAGE 張數	1 OF 1	REV. 版次	ROHS
		A	PART NO.
			料號
			C8381-19MNLSNBR