


6W Isolated DC-DC converter in SIP package
Ultra-wide input and regulated dual output



Patent Protection RoHS

URA_S-6WR3G series of isolated 6W DC-DC converter products with an ultra-wide 4:1 input voltage range. They feature efficiencies of up to 83%, 1500VDC input to output isolation, operating ambient temperature range of -40°C to +85°C, input under-voltage protection, output short-circuit, over-current protection and they are widely used in applications such as medical care, industrial control, electric power, instruments and communication fields.

FEATURES

- Ultra-wide 4:1 input voltage range
- High efficiency up to 83%
- No-load power consumption as low as 0.29W
- I/O isolation test voltage 1.5k VDC
- Input under-voltage protection, output short-circuit, over-current protection
- Operating ambient temperature range: -40°C to +85°C
- Industry standard pin-out

Selection Guide

Certification	Part No.	Input Voltage (VDC)		Output		Full Load Efficiency ^② (%) Min./Typ.	Capacitive Load ^③ (μF)Max.
		Nominal (Range)	Max. ^①	Voltage(VDC)	Current (mA) Max./Min.		
--	URA2405S-6WR3G	24 (9-36)	40	±5	±600/0	78/80	470
	URA2409S-6WR3G			±9	±333/0	81/83	220
	URA2412S-6WR3G			±12	±250/0	81/83	120
	URA2415S-6WR3G			±15	±200/0	81/83	100
	URA2424S-6WR3G			±24	±125/0	80/82	68

Notes:

- ① Exceeding the maximum input voltage may cause permanent damage;
② Efficiency is measured at nominal input voltage and rated output load;
③ The specified maximum capacitive load for positive and negative output is identical.

Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Current (full load / no-load)	24VDC nominal input series, nominal input voltage	±5V output	--	313/12	320/16	mA
		±9V/±12V/±15V output	--	301/12	309/16	
		±24V output	--	305/12	313/16	
Reflected Ripple Current			--	50	--	
Surge Voltage (1sec. max.)	24VDC nominal input series		-0.7	--	50	VDC
Start-up Voltage	24VDC nominal input series		--	--	9	
Input Under-voltage Protection	24VDC nominal input series		5.5	6.5	--	
Input Filter			Capacitance Filter			
Hot Plug			Unavailable			
Ctrl *	Module on		Ctrl pin open or pulled high (3.5-12VDC)			
	Module off		Ctrl pin pulled low to GND (0-1.2VDC)			
	Input current when off		--	6	10	mA

Note: *The Ctrl pin voltage is referenced to input GND.

Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Voltage Accuracy ^①	5% -100% load	Vo1	--	±1.5	±2	%
		Vo2	--	±2	±3	
Linear Regulation	Input voltage variation from low to high at full load	Vo1	--	±0.5	±1	
		Vo2	--	±1	±1.5	
Load Regulation ^②	5% -100% load	Vo1	--	±0.8	±1.5	
		Vo2	--	±1.2	±2	
Cross Regulation	Dual output, Vo1 load at 50%, Vo2 load at range of 25%-100%		--	--	±5	
Transient Recovery Time	25% load step change, nominal input voltage		--	450	500	μs
Transient Response Deviation	25% load step change, nominal input voltage	±5V output	--	±5	±8	%
		Others	--	±3	±5	
Temperature Coefficient	Full load		--	--	±0.03	%/°C
Ripple & Noise ^③	20MHz bandwidth, 5% -100% load		--	120	150	mV p-p
Over-current Protection	Input voltage range		110	160	230	%Io
Short-circuit Protection	Input voltage range	Continuous, self-recovery				

Note:
 ①At 0%~5% load, the Vo1 Max. output voltage accuracy is ±3%, the Vo2 Max. output voltage accuracy is ±5%;
 ②At 0%~100% load, the Vo1 regulation for 0%-100% load is ±4%, the Vo2 regulation for 0%-100% load is ±4.5%;
 ③Under 0% -5% load conditions, ripple & noise does not exceed 180mV. The "parallel cable" method is used for Ripple and Noise test, please refer to DC-DC Converter Application Notes for specific information.

General Specification

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Isolation	Input-output Electric Strength test for 1 minute with a leakage current of 1mA max.	1500	--	--	VDC
Insulation Resistance	Input-output insulation at 500VDC	1000	--	--	M Ω
Isolation Capacitance	Input-output capacitance at 100kHz/0.1V	--	1000	--	pF
Operating Temperature	See Fig. 1	-40	--	+85	℃
Storage Humidity	Without condensation	5	--	95	%RH
Storage Temperature		-55	--	+125	℃
Pin Soldering Resistance Temperature	Soldering spot is 1.5mm away from case for 10 seconds	--	--	+300	
Vibration		10-150Hz, 5G, 0.75mm. along X, Y and Z			
Switching Frequency *	PWM mode	--	500	--	kHz
MTBF	MIL-HDBK-217F@25℃	1000	--	--	k hours
Note: *Switching frequency is measured at full load. The module reduces the switching frequency for light load (below 50%) efficiency improvement.					

Mechanical Specifications

Case Material	Black plastic; flame-retardant and heat-resistant (UL94-V0)
Dimensions	22.00 x 9.50 x 12.00 mm
Weight	4.6g (Typ.)
Cooling method	Free air convection

Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032	CLASS B (see Fig.3-② for recommended circuit)
	RE	CISPR32/EN55032	CLASS B (see Fig.3-② for recommended circuit)
Immunity	ESD	IEC/EN61000-4-2	Contact ±4kV perf. Criteria B
	RS	IEC/EN61000-4-3	10V/m perf. Criteria A
	EFT	IEC/EN61000-4-4	±2kV (see Fig.3-① for recommended circuit) perf. Criteria B
	Surge	IEC/EN61000-4-5	line to line ±2kV(see Fig.3-① for recommended circuit) perf. Criteria B
	CS	IEC/EN61000-4-6	3 Vr.m.s perf. Criteria A

Typical Characteristic Curves






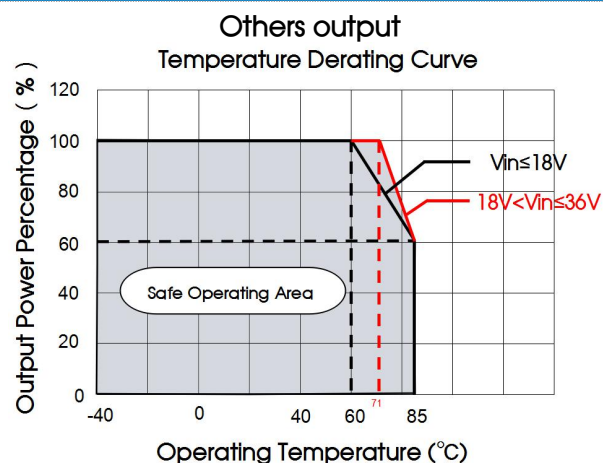


Fig. 1

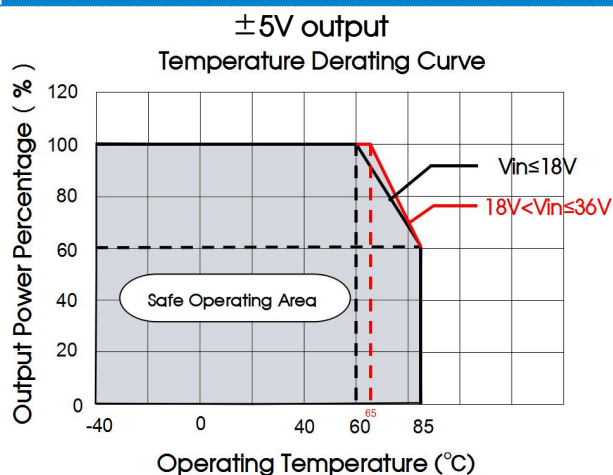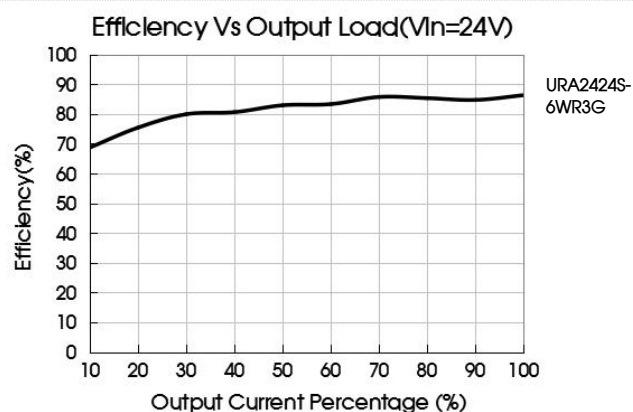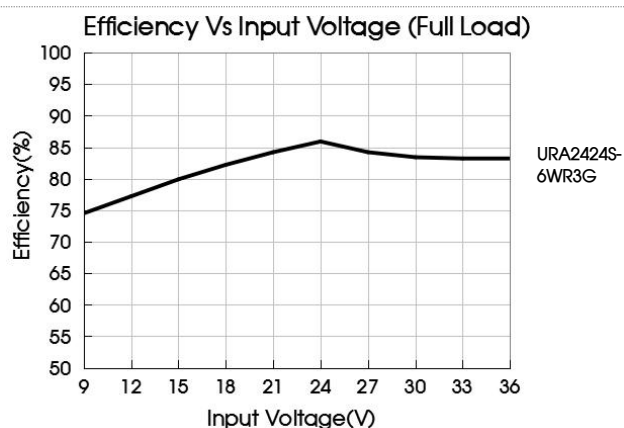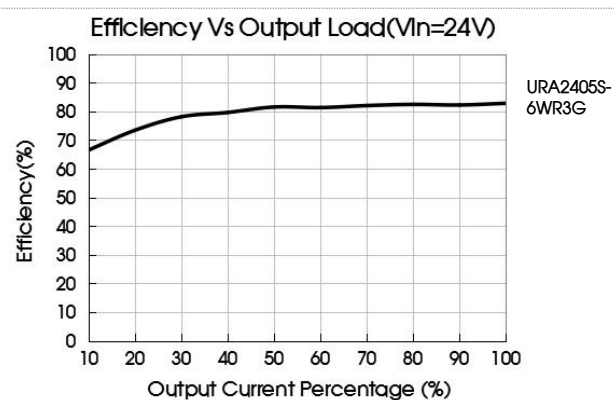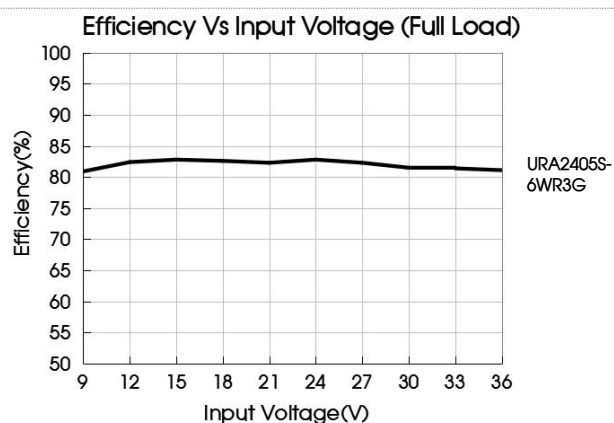

Design Reference

1. Typical application

All the DC/DC converters of this series are tested before delivery using the recommended circuit shown in Fig. 2.

Input and/or output ripple can be further reduced by appropriately increasing the input & output capacitor values C_{in} and C_{out} and/or by selecting capacitors with a low ESR (equivalent series resistance). Also make sure that the capacitance is not exceeding the specified max. capacitive load value of the product.



Fig. 2

V_{in}	C_{in}	C_{out}
24VDC	100 μ F/100V	22 μ F/50V

2. EMC compliance circuit

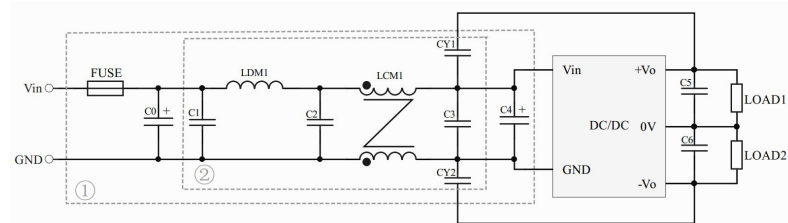


Fig. 3

Notes: For EMC tests we use Part ① in Fig. 3 for immunity and part ② for emissions test. Selecting based on needs

Parameter description:


Components	V_{in} : 24VDC
FUSE	Choose according to actual input current
C0/C4	330 μ F/100V
C1/C2/C3	10 μ F/50V
LDM1	10 μ H
LCM1	1.4-1.7mH (TN150P-RH12.7*12.7*7.9)
CY1/CY2	1nF/2kV

3. The products do not support parallel connection of their output


4. For additional information please refer to DC-DC converter application notes on

www.mornsun-power.com

Dimensions and Recommended Layout

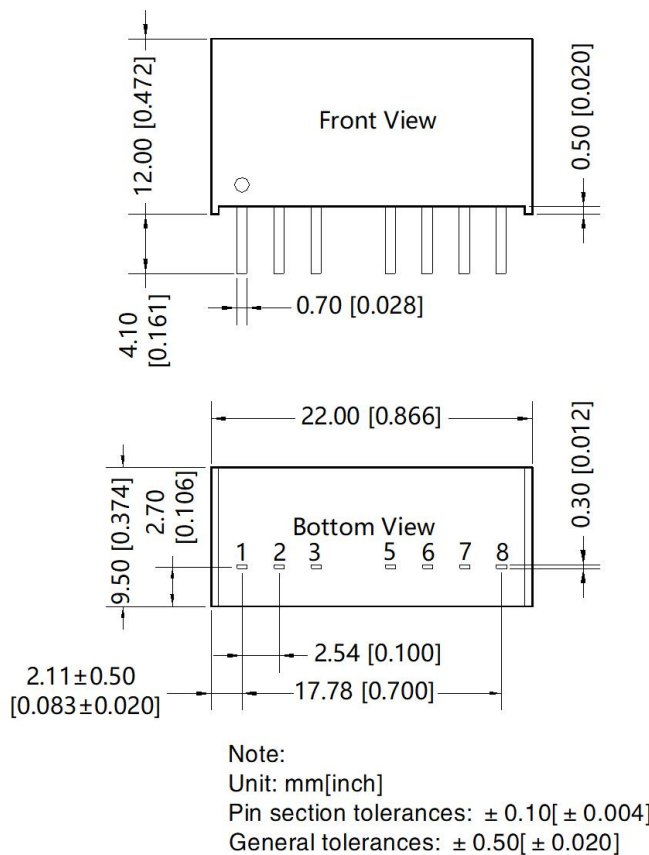

THIRD ANGLE PROJECTION

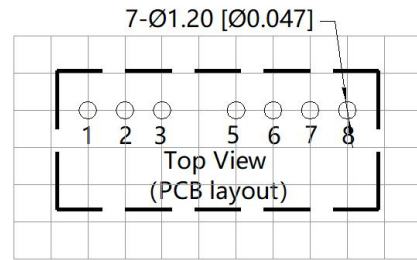

Note: Grid 2.54*2.54mm

Pin-Out	
Pin	Mark
1	GND
2	Vin
3	Ctrl
5	NC
6	+Vo
7	0V
8	-Vo

NC: No connection

Note:

- For additional information on Product Packaging please refer to www.mornsun-power.com. packaging number: 58210004;
- The maximum capacitive load offered were tested at input voltage range and full load;
- Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75%RH with nominal input voltage and rated output load;
- All index testing methods in this datasheet are based on company corporate standards;
- We can provide product customization service, please contact our technicians directly for specific information;
- Products are related to laws and regulations: see "Features" and "EMC";
- Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China
Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: info@mornsun.cn www.mornsun-power.com