

30W isolated DC-DC converter in 1x1 inch
Ultra-wide input and regulated single output



Patent Protection RoHS



URB_YMD-30WR3G series of isolated 30W DC-DC converter products with an ultra-wide 4:1 input voltage range. They feature efficiencies up to 90%, input to output isolation is tested with 1500VDC and the converter safely operate ambient temperature of -40°C to +105°C, input under-voltage protection, output short-circuit, over-current, over-voltage and over-temperature protection. They are ideally and widely used in applications such as industrial control, electric power, instruments and communications.

FEATURES

- Ultra-Wide 4:1 input voltage range
- High efficiency up to 90%
- No-load power consumption as low as 0.096W
- I/O isolation test voltage 1.5k VDC
- Input under-voltage protection, output short-circuit, over-current, over-voltage, over-temperature protection
- Operating ambient temperature range: -40°C to +105°C
- Industry standard pin-out
- Components are 100% domestic

Selection Guide

Certification	Part No.	Input Voltage (VDC)		Output		Full Load Efficiency ^② (%) Min./Typ.	Capacitive Load (μF)Max.
		Nominal (Range)	Max. ^①	Voltage (VDC)	Current(mA) Max./Min.		
--	URB2405YMD-30WR3G	24 (9-36)	40	5	6000/0	86/88	10000
	URB2412YMD-30WR3G			12	2500/0	88/90	1500
	URB2415YMD-30WR3G			15	2000/0	88/90	1000
	URB2424YMD-30WR3G			24	1250/0	88/90	750
	URB2428YMD-30WR3G			28	1071/0	88/90	750

Notes:

- ① Exceeding the maximum input voltage may cause permanent damage;
② Efficiency is measured in nominal input voltage and rated output load;

Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Current (full load / no-load)	Nominal input voltage	5V output	--	1420/4	1453/12	mA
		Others	--	1388/4	1420/12	
Reflected Ripple Current	Nominal input voltage		--	100	--	VDC
Surge Voltage (1sec. max.)			-0.7	--	50	
Start-up Voltage			--	--	9	
Input under-voltage protection			5.5	7.5	--	
Start-up Time	Nominal input voltage & constant resistance load		--	30	100	ms
Input Filter			Capacitance filter			
Hot Plug			Unavailable			
Ctrl*	Module on		Ctrl pin open or pulled high (TTL 3.5-12VDC)			
	Module off		Ctrl pin pulled low to GND (0-1.2VDC)			
	Input current when off		--	2	7	mA

Note: *The Ctrl pin voltage is referenced to input GND.

Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
------	----------------------	------	------	------	------

Voltage Accuracy ^①	5%-100% load	--	±1	±3	%
Linear Regulation	Input voltage variation from low to high at full load	--	±0.2	±0.5	
Load Regulation ^②	5%-100% load	--	±0.5	±1	
Transient Recovery Time	25% load step change, nominal input voltage	--	250	500	μs
Transient Response Deviation	25% load step change, input voltage range	--	±5	±8	%
Temperature Coefficient	Full load	--	--	±0.03	%/°C
Ripple & Noise ^③	20MHz bandwidth, nominal input voltage, 5%-100% load	--	100	150	mV p-p
Trim	Input voltage range	90	--	110	%Vo
Over-temperature Protection	Max. Case Temperature	--	125	--	°C
Over-voltage Protection	Input voltage range	110	140	160	%Vo
Over-current Protection		110	160	300	%Io
Short circuit Protection		Hiccup, continuous, self-recovery			

Note:
^①Output voltage accuracy for 0%-5% load is ±5% max;
^②Load regulation for 0% -100% load increases to ±3%;
^③Under 0% -5% load conditions, ripple & noise does not exceed 5%Vo. The "parallel cable" method is used for ripple and noise test, please refer to DC-DC Converter Application Notes for specific information.

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Isolation	Input-output Electric Strength Test for 1 minute with a leakage current of 1mA max.	1500	--	--	VDC
Insulation Resistance	Input-output resistance at 500VDC	1000	--	--	MΩ
Isolation Capacitance	Input-output capacitance at 100kHz/0.1V	--	10	--	nF
Operating Temperature	See Fig. 1	-40	--	+105	°C
Storage Temperature		-55	--	+125	
Storage Humidity	Non-condensing	5	--	95	%RH
Pin Soldering Resistance Temperature	Soldering spot is 1.5mm away from case for 10 seconds	--	--	+300	°C
Vibration		10-150Hz, 5G, 0.75mm. along X, Y and Z			
Switching Frequency *	PWM mode	--	400	--	kHz
MTBF	MIL-HDBK-217F@25°C	1000	--	--	k hours

Note: *Switching frequency is measured at full load. The module reduces the switching frequency for light load (below 50%) efficiency improvement.

Mechanical Specifications

Case Material	Aluminum alloy
Dimensions	25.40 × 25.40 × 11.70 mm
Weight	20.0g(Typ.)
Cooling method	Free air convection

Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032	CLASS B (see Fig.3-② for recommended circuit)	
	RE	CISPR32/EN55032	CLASS B (see Fig.3-② for recommended circuit)	
Immunity	ESD	IEC/EN61000-4-2	Contact ±6kV	perf. Criteria B
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN61000-4-4	±2kV (see Fig.3-① for recommended circuit)	perf. Criteria A
	Surge	IEC/EN61000-4-5	line to line ±2kV (see Fig.3-① for recommended circuit)	perf. Criteria A
	CS	IEC/EN61000-4-6	3 Vr.m.s	perf. Criteria A

Typical Characteristic Curves


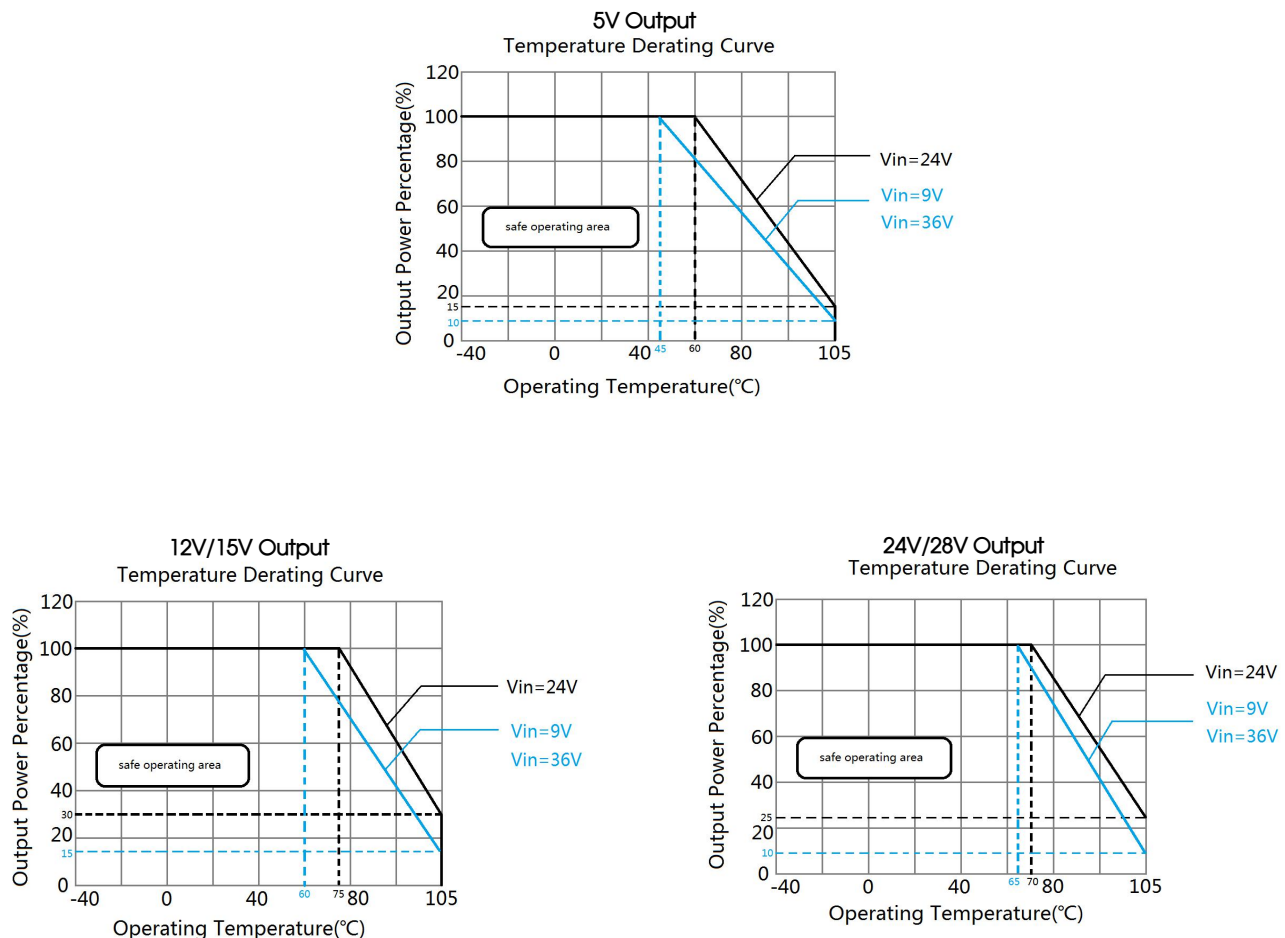


Fig. 1

Noted: Test PCB: 160x50mm, 2oz, triple layer

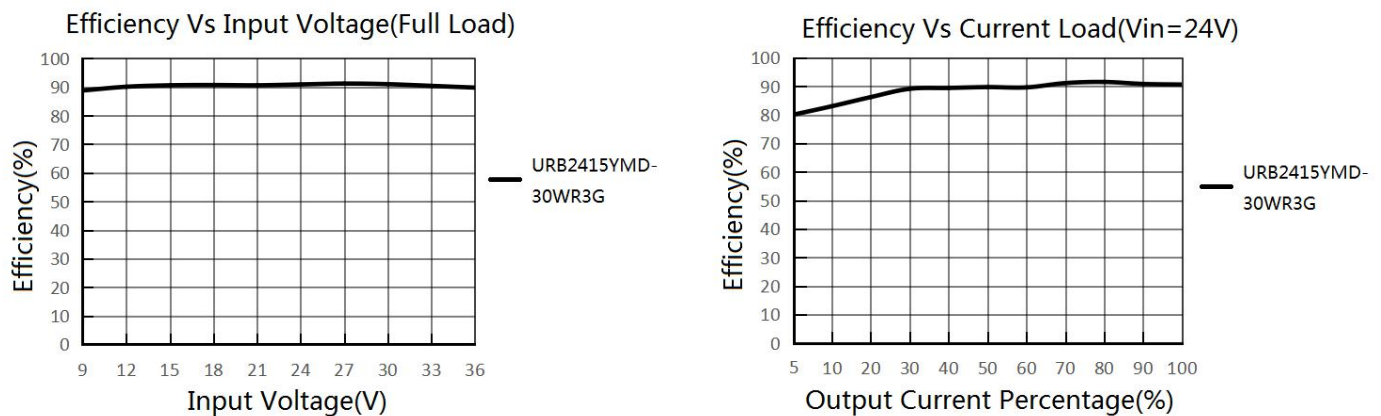


Design Reference

1. Typical application


All DC-DC converters of this series are tested before delivery using the recommended circuit shown in Fig. 2.

Input and/or output ripple can be further reduced by appropriately increasing the input & output capacitor values C_{in} and C_{out} and/or by selecting capacitors with a low ESR (equivalent series resistance). Also make sure that the capacitance is not exceeding the specified max. capacitive load value of the product.

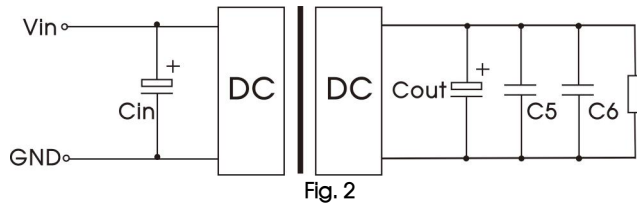

Vout (VDC)	Cin	Cout	C5/C6
5	100uF/50V	470uF/50V	10uF/16V
12/15			10uF/25V
24/28			10uF/50V

2. EMC compliance circuit

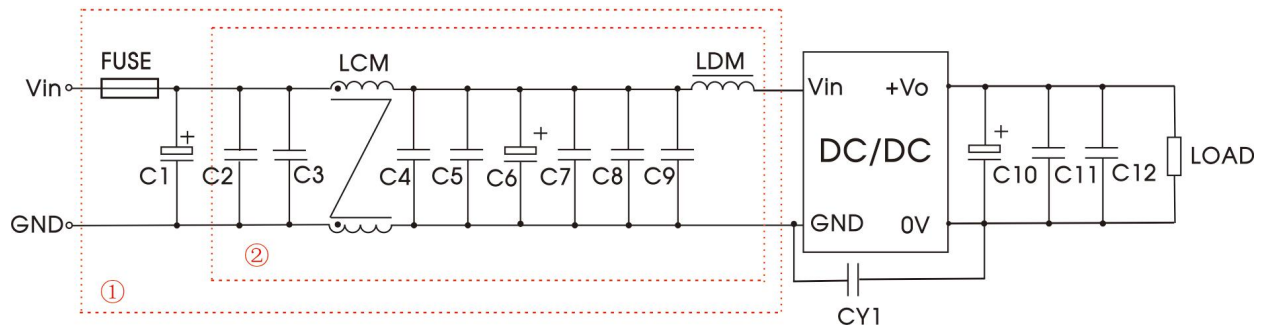


Notes: We use Part ① in Fig. 3 for Immunity tests and Part ② for Emissions test. Selecting based on needs.

Parameter description:

Components	Vin: 24VDC
FUSE	Choose according to actual input current
C1	1000uF/50V
C2/C3/C4/C5/C7/C8/C9	4.7uF/50V
LCM	350uH*2, Recommend use Mornsun P/N, FL2D-30-351
C6	220uF/50V
LDM	2.2uH
C10	Refer to the Cout in Fig.2
C11/C12	Refer to the C5, C6 in Fig.2
CY1	Y2/222K/250VAC
Note: The Part ② of the circuit can be simplified, and ClassA can be satisfied by removing the LCM.	

3. Trim Function for Output Voltage Adjustment (open if unused)

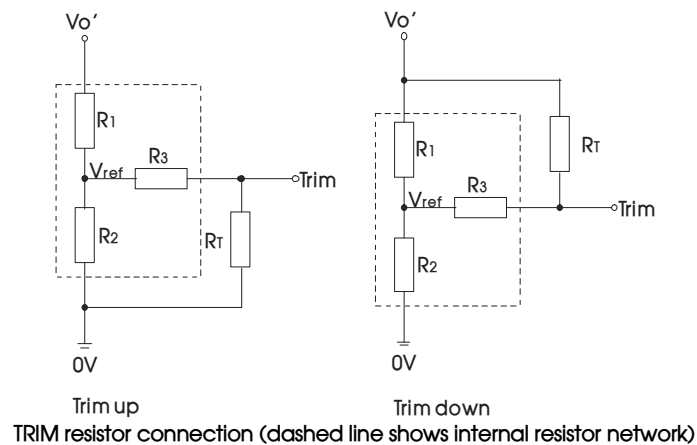

Calculating Trim resistor values:

$$\text{up: } R_T = \frac{aR_2}{R_2 - a} - R_3 \quad a = \frac{V_{ref}}{V_{o'} - V_{ref}} \cdot R_1$$

$$\text{down: } R_T = \frac{aR_1}{R_1 - a} - R_3 \quad a = \frac{V_{o'} - V_{ref}}{V_{ref}} \cdot R_2$$


R_T is Trim resistance
 a is a self-defined parameter,
with no real meaning.

Vout(V)	R1(k Ω)	R2(k Ω)	R3(k Ω)	Vref(V)
5	2.87	2.87	5.6	2.5
12	10.91	2.87	15	2.5
15	14.35	2.87	15	2.5
24	24.77	2.87	17.4	2.5
28	29.41	2.87	17.4	2.5


4. The products do not support parallel connection of their output

5. For additional information please refer to DC-DC converter application notes on www.mornsun-power.com

Dimensions and Recommended Layout

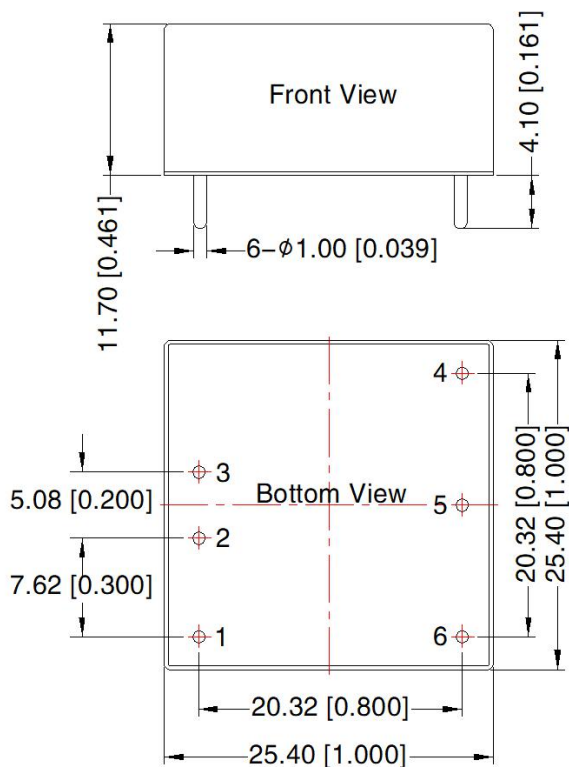

THIRD ANGLE PROJECTION

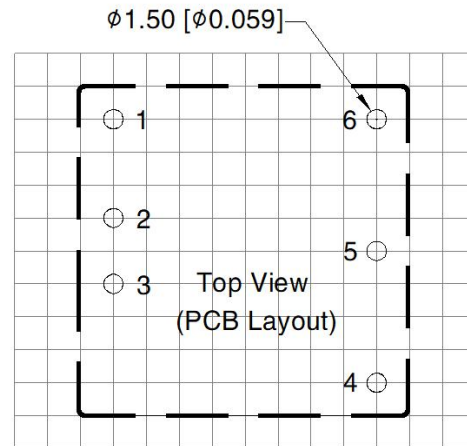

Note: Grid 2.54*2.54mm

Pin-Out	
Pin	Mark
1	Ctrl
2	GND
3	Vin
4	+Vo
5	Trim
6	0V

Note:
Unit: mm[inch]
Pin diameter tolerances: ± 0.10 [± 0.004]
General tolerances: ± 0.50 [± 0.020]

Note:

- For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58210003;
- If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
- The maximum capacitive load offered were tested at input voltage range and full load;
- Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75%RH with nominal input voltage and rated output load;
- All index testing methods in this datasheet are based on company corporate standards;
- We can provide product customization service, please contact our technicians directly for specific information;
- Products are related to laws and regulations: see "Features" and "EMC";
- Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China
Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: info@mornsun.cn www.mornsun-power.com